



PTT PHENOL COMPANY
LIMITED

PROCESS SPECIFICATION

DIAMINE INJECTION TANK (D-2312)

Docu. No. : 14780-8120-PS-D2312
Project No. : 120117
Rev. No. : Z1
Date : MAY 10, 2016
Page : 1 / 4

TITLE :

DIAMINE INJECTION TANK

(D-2312)

DISCIPLINE : PROCESS
DOCUMENT NO. : 14780-8120-PS-D2312
PROJECT NAME : PTT Phenol Train II Project
PROJECT NO. : 120117
OWNER : PTT Phenol Company Limited (PPCL)

Z1	MAY 10, 2016	AS BUILT		S.W.Park	J.S.Chung	S.W.Lee
F1	JAN 19, 2015	FINAL ISSUE		S.W.Park	J.S.Chung	S.W.Lee
A1	JAN 09, 2015	APPROVED FOR DESIGN		S.W.Park	J.S.Chung	S.W.Lee
O1	NOV 18, 2014	COMMENT ISSUE		S.W.Park	J.S.Chung	S.W.Lee
REV. NO.	DATE	DESCRIPTION		PREP'N	REVIEW	QA REVIEW
REV. NO.	PREPARATION DEPT.	PREPARATION	REVIEW	QA REVIEW		APPROVAL
Z1	PROCESS	S.W.Park	J.S.Chung	-		S.W.Lee
		MAY 10, 2016	MAY 10, 2016	-		MAY 10, 2016

This Document is the property of POSCO Engineering Co., Ltd. Therefore, it shall not be released to Any third party without permission of an authorized personnel of the POSCO Engineering Co., Ltd.

[illegible]

Revision
Indication



Note: The information in this document is confidential and the property of UOP LLC and must not be disclosed to others or reproduced in any manner or used for any purpose whatsoever without its written permission.



VESSELS

PROJECT SPECIFICATION

963766 — 301

SHEET 3 / 4

REV	DATE	BY	APVD	REV	DATE	BY	APVD
0	29MAR12	JG	MYW				

General Notes

- A. Vessels shall be constructed in accordance with the following unless otherwise specified on the individual vessel specification sheet.

Standards:

UOP Standard Specification 3-11
UOP Standard Drawing 8-121

- B. Although the resulting inside diameter may be slightly different than specified, vessels without trays or packing, may be fabricated from pipe.
- C. The dimensioned location of some of the vessel level nozzles may be noted as min (minimum) or max (maximum). It is the responsibility of the contractor to adjust these dimensions to suit the specific level requirements specified on the UOP Piping and Instrument Diagram(s) and on UOP Standard Drawing 8-121. When additional nozzles are required for level instrumentation, the contractor shall specify them consistent with the size, class and facing requirements specified in the UOP Project Specification 301-Vessels and on the UOP Piping and Instrument Diagram(s).
- D. When system of measurement is metric, all dimensions are in millimeters unless noted otherwise.
- E. Contractor shall not locate TI thermowells in a downcomer. Contractor shall also ensure that TI thermowells are located to avoid interference with downcomers, weirs, distributors, collectors, baffles, chimneys, traps and all other vessel internals.

Other specifications
referenced in this
specification:

UOP Standard Specification: 3-11, 3-15

UOP Standard Drawing: 3-115, 3-122, 3-123, 3-183, 3-190, 3-272, 3-278, 3-280, 3-305, 3-313, 3-322, 8-121

UOP Project Specification: 963766-307, 963766-401, 963766-808

POSCO ENGINEERING

VESSEL DATA SHEET

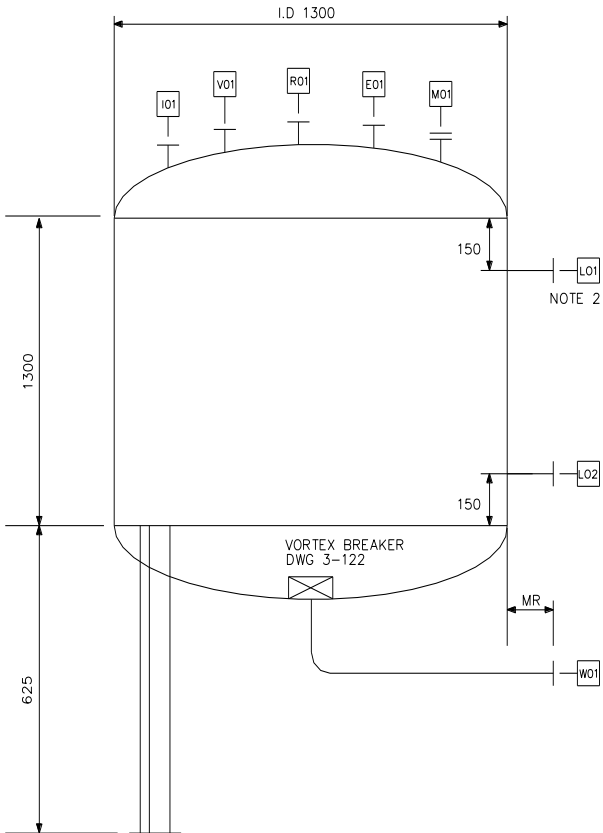
PAGE : 4 of 4

CLIENT : PTT PHENOL				REV.	DATE	REV.	DATE
JOB NAME : PTT PHENOL TRAIN II PROJEC T				O1	NOV 18, 2014		
JOB NO : 120117				A1	JAN 09, 2015		
PLANT LOCATION : MAP TA PHUT, THAILAND				F1	JAN 19, 2015		
REV DOC. NO : 14780-8120-PS-D2312				Z1	MAY 10, 2016		

Item No. D-2312			Service DIAMINE INJECTION TANK	
No. Req'd 1 (ONE)			Type VERTICAL	
Regulation			Code ASME SECTION VIII DIV.1	

DESIGN CONDITIONS		
Fluid Name		DIAMINE(HMDA)
Density at Oper. Temp. kg/m ³		914
Shell Inside Diameter mm		1300
Pressure	Oper.	0.01
	kg/cm2g Design	3.5
Temperature	Oper.	40
	Design	120
	°C MDMT	15
Material	Shell	SA 240 TYPE 304 L
	Head	SA 240 TYPE 304 L
	INTL	
	Support	SA 240 TYPE 304 L
Corrosion	Shell	1.5
	Head	1.5
Allowance	mm	
	INTL	
PWHT		MR
Radiograph		MR
Joint Efficiency		
This Vessel is in the Following Service(s):		
Hydrogen		NO
Hydrofluoric (HF) Acid		NO
Hydrofluoric (HF) Acid (with Resid. Elem. Control)		NO
Wet Hydrogen Sulfide (H2S)		NO
Cyclic		NO
Caustic		NO
Carbonate		NO
Amine		YES
Vessel Heads : 2:1 ELLIPTICAL. TOP/BOTTOM		
Insulation : NO		
Weight : Empty ,Full		

NOZZLE SCHEDULE				
Mark	Qty.	Size	Rating & Facing	Service
MO1	1	8	CL 150, RF	INSPECTION
EO1	1	2	CL 150, RF	VENT
IO1	1	2	CL 150, RF	INLET
RO1	1	4	CL 150, RF	RELIEF
VO1	1	2	CL 150, RF	VENT
WO1	1	2	CL 150, RF	OUTLET
LO1	1	2	CL 300, RF	LEVEL
LO2	1	2	CL 300, RF	LEVEL

UNIT : mm	
	

ACCESSORIES	

1. READYMADE TOTE IS ACCEPTABLE WITH 1.00 M3 OF OPERATING VOLUME (OPERATING RANGE OF LIQUID LEVEL : 20% TO 80%).

2. THE LOCATION OF L01 NOZZLE CAN BE ON SIDE OR TOP OF THE VESSELE AS PER SELECTED LEVEL GAUGE. TO BE COMFIRMED LATER.